



FEATURES

- ◆ 1.5 WATTS REGULATED OUTPUT POWER
- ◆ LOW OUTPUT RIPPLE & NOISE
- ◆ PI TYPE INPUT FILTER
- ◆ 1000VDC ISOLATION VOLTAGE
- ◆ HIGH EFFICIENCY UP TO 78%
- ◆ STANDARD (1"×1") DIP PACKAGE
- ◆ FIVE-SIDED EMI SHIELD

MODEL SELECTION

MB^①05^②05^③-X^④MD^⑤-1W5^⑥

- ① Product Series ② Input Voltage
 ③ Output Voltage ④ Fixed Input
 ⑤ (1"×1")DIP Package Style ⑥ Rated Power

APPLICATIONS

The MB-XMD-1W5 series offer 1.5 watts of output power from a package in an IC compatible 1"×1" DIP configuration without derating to 71°C ambient temperature. MB-XMD-1W5 series have input voltage of

4.5-5.5, 10.8-13.2, 21.6-26.4 & 43.2-52.5VDC.

MB-XMD-1W5 features 1000VDC of isolation voltage.

A safety designed meet to EN60950-1 and UL60950-1.

All models are particularly suited to telecommunications, industrial, mobile telecom and test equipment applications.



OUTPUT SPECIFICATIONS

Output power		1.5 Watts max
Voltage accuracy	Full load and nominal Vin	±4
Minimum load		0%
Line regulation	LL to HL at Full Load	±0.3%
Load regulation	25% to 100% FL	MB05 output others
		±1.5 ±0.5
Cross regulation	Asymmetrical load 25% / 100% FL	±5%
Ripple and noise	20MHz bandwidth	50mVp-p
Temperature coefficient		±0.02% /°C, max
Short circuit protection		Short term

INPUT SPECIFICATIONS

Input voltage range	5V nominal input	4.5~5.5VDC
	12V nominal input	10.8~13.2VDC
	24V nominal input	21.6~26.4VDC
	48V nominal input	43.2~52.5VDC
Input filter		Pi type

GENERAL SPECIFICATIONS

Efficiency		See table
Isolation voltage		1000VDC, min
Isolation resistance		10 ⁹ ohms, min
Isolation capacitance		30pF, max
Switching frequency		20KHz, min
Design meet safety standard		IEC60950-1, UL60950-1, EN60950-1
Case material		Nickel-coated copper
Base material		Non-conductive black plastic
Potting material		Epoxy (UL94-V0)
Dimensions		1.00 X 1.00 X 0.40 Inch (25.4 X 25.4 X 10 mm)
Weight		16g (0.55oz)
MTBF ¹		5.531 x 10 ⁶ hrs

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range		-25°C ~ +71°C
Maximum case temperature		+100°C
Storage temperature range		-55°C ~ +105°C
Thermal impedance	Nature convection	20°C/watt
Thermal shock		MIL-STD-810D
Vibration		10~55Hz, 10G, 30minutes along X,Y and Z
Relative humidity		5% to 95% RH


EMC CHARACTERISTICS

Conducted emissions	EN55022	Class A
Radiated emissions	EN55022	Class A
ESD	EN61000-4-2	Perf. Criteria B
Radiated immunity	EN61000-4-3	Perf. Criteria A
Fast transient	EN61000-4-4	Perf. Criteria B
Surge	EN61000-4-5	Perf. Criteria B
Conducted immunity	EN61000-4-6	Perf. Criteria A

Model Number	Input Range	Output Voltage	Output Current	Input Current ²	Eff ³ (%)	Capacitor Load max ⁴
MB0505XMD-1W5	4.5 – 5.5 VDC	5 VDC	300mA	405.4mA	74	470uF
MB0512XMD-1W5	4.5 – 5.5 VDC	12 VDC	125mA	162.3mA	77	330uF
MB0515XMD-1W5	4.5 – 5.5 VDC	15 VDC	100mA	128.2mA	78	330uF
MB1205XMD-1W5	10.8 – 13.2 VDC	5 VDC	300mA	416.7mA	72	470uF
MB1212XMD-1W5	10.8 – 13.2 VDC	12 VDC	125mA	168.9mA	74	330uF
MB1215XMD-1W5	10.8 – 13.2 VDC	15 VDC	100mA	133.3mA	75	330uF
MB2405XMD-1W5	21.6 – 26.4 VDC	5 VDC	300mA	434.8mA	69	470uF
MB2412XMD-1W5	21.6 – 26.4 VDC	12 VDC	125mA	178.6mA	70	330uF
MB2415XMD-1W5	21.6 – 26.4 VDC	15 VDC	100mA	140.8mA	71	330uF
MB4805XMD-1W5	43.2 – 52.5VDC	5 VDC	300mA	422.5mA	71	470uF
MB4812XMD-1W5	43.2 – 52.5VDC	12 VDC	125mA	171.2mA	73	330uF
MB4815XMD-1W5	43.2 – 52.5VDC	15 VDC	100mA	135.1mA	74	330uF


Note

1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C. (Ground fixed and controlled environment)
2. Maximum value at nominal input voltage and full load of standard type.
3. Typical value at nominal input voltage and full load.
4. Test by minimum Vin and constant resistive load.

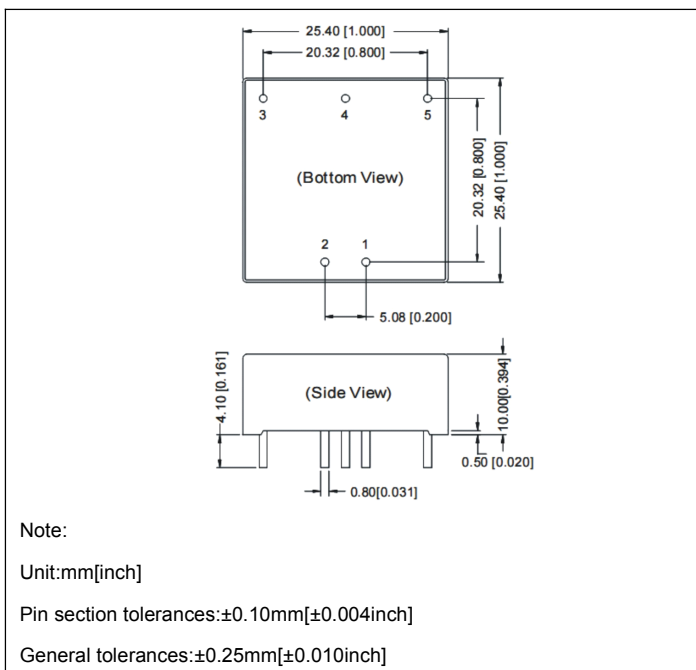


RECOMMENDED FOOTPRINT

Single Output

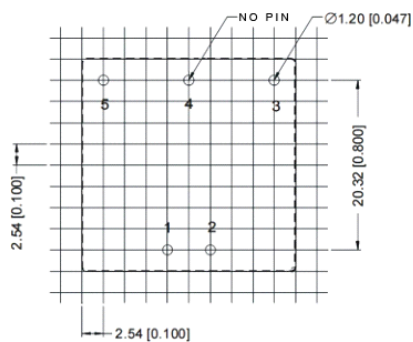

TUBE OUTLINE DIMENSIONS

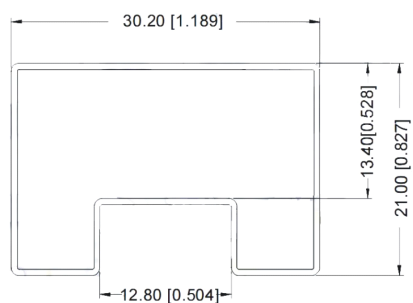

Note:

Unit :mm[inch]

General tolerances: ±0.50mm[±0.020inch]

L=530mm[20.866inch] Tube Quantity: 19pcs

L=220mm[8.661inch] Tube Quantity: 7pcs

When the environment temperature is higher than 71°C, the product output power should be less than 60% of the rated power.

No parallel connection or plug and play.

Use dual output simultaneously, forbid opening output pin (0V) to use as single output.

FOOTPRINT DETAILS

Pin	Single
1	GND
2	Vin
3	+V0
4	NC
5	0V