


FIXED INPUT, ISOLATED & REGULATED Single Output DC/DC Converter



FEATURES

- ◆ RoHS compliant
- ◆ Efficiency up to 84%
- ◆ SIP7 Package
- ◆ Wide temperature performance at full 2 Watt load, -40°C ~ 85°C
- ◆ UL 94V-0 package material
- ◆ No heat sink required
- ◆ Small Footprint
- ◆ Industry standard pin out
- ◆ Power sharing on output
- ◆ 1KVDC isolation
- ◆ Continuous Short Circuit Protection
- ◆ Internal SMD construction
- ◆ No external components required
- ◆ MTTF up to 1.5 million hours

MODEL SELECTION

2B^① 05^② 05^③ X^④ S^⑤ R^⑥

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Fixed Input
- ⑤ SIP7 Package
- ⑥ Rated Power

APPLICATIONS

The 2B_XSR series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) where the voltage of the input power supply is fixed (voltage variation $\leq \pm 5\%$);
- 2) where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) where the regulation of the output voltage and the output ripple noise are demanded.

SELECTION GUIDE

Order code	Input		Output			Efficiency (% Typ)	Switching Frequency (KHz Typ)
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max	Min		
2B0505XSR	5	4.75-5.25	5	400	40	70	100
2B0512XSR	5	4.75-5.25	12	167	17	78	96
2B0515XSR	5	4.75-5.25	15	100	10	75	97
2B1205XSR	12	11.4-12.6	5	400	40	71	55
2B1212XSR	12	11.4-12.6	15	100	10	76	90
2B1215XSR	12	11.4-12.6	15	133	13	76	87
2B1505XSR	15	14.25-15.	5	400	40	71	67
2B2405XSR	24	22.8-25.2	5	400	40	71	67
2B2415XSR	24	22.8-25.2	15	133	13	75	65

ISOLATION SPECIFICATIONS

Parameter	Test conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 minute and 1mA max	1000			VDC
Isolation resistance	Test at $V_{iso}=500\text{VDC}$	1000			MΩ

OUTPUT SPECIFICATIONS

Parameter	Test conditions	Min	Typ.	Max.	Units
Output power		0.2		2	W
Line regulation	For V_{in} change of $\pm 5\%$			± 0.25	%
Load regulation	10% to 100% full load			± 1.5	%
Output voltage accuracy	100% full load			± 3	%
Temperature drift	100% full load			0.03	%/°C
Output Ripple*	20MHz Bandwidth		20	30	MV p-p
Output Noise*	20MHz Bandwidth		50	100	MV p-p
Switching frequency	Full load, nominal input		100		Khz

* Test ripple and noise by "parallel cable" method.



See detailed operation instructions at Testing of Power Converter section, application notes.



CE REACH

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Storage humidity range				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	°C
Lead temperature	1.5mm from case for 10 seconds		20	30	°C
Temp.rise at full load				300	°C
Cooling	Free air convection				
Case material	Plastic(UL94-V0)				
Short circuit protection	Continuous				
MTBF		3500		1*	K hours
Weight			2.8		g

*Supply voltage must be discontinued at the end of short circuit duration.

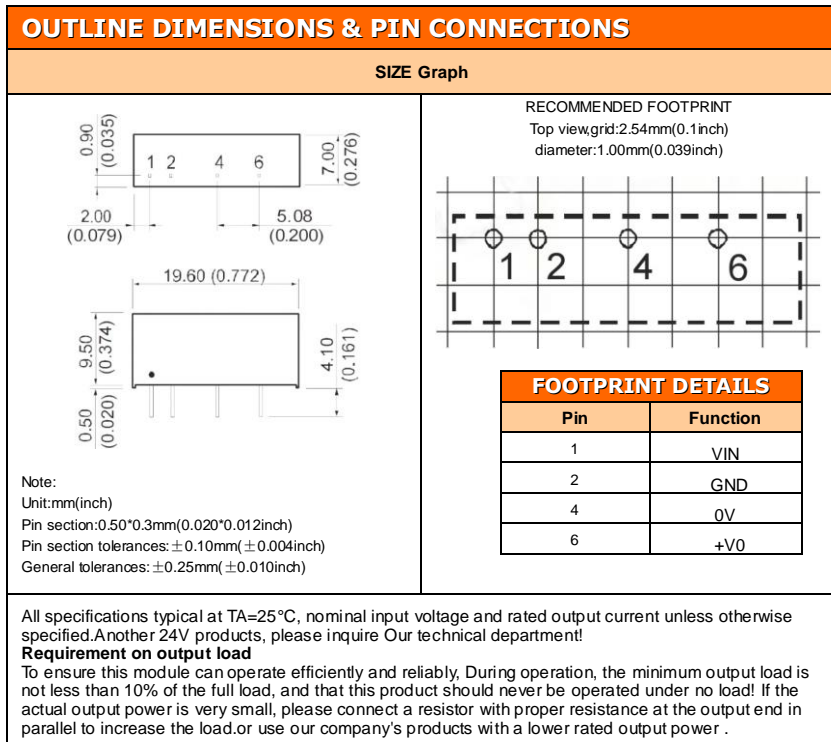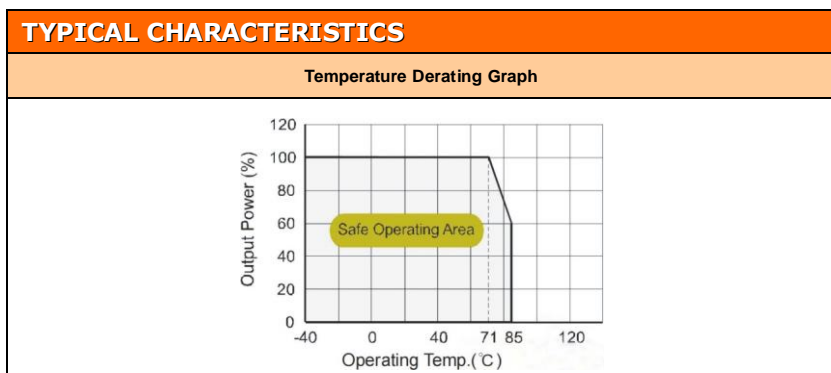

Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (TABLE 1)			
Vin (VDC)	Cin (μF)	Vout (VDC)	Cout (μF)
5	4.7	5	4.7
12	2.2	-	-
15	1.0	-	-
24	0.47	-	-

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short - circuits . The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series (Figure 2).

(Figure 2)

When the environment temperature is higher than 71 °C, the product output power should be less then 60% of the rated power.

No parallel connection or plug and play.

Use dual output simultaneously, forbid opening output pin (0V) to use as single output.